



PRODUCT INFORMATION

February 2019

30100

Mobile Waste Oil Extractor/Drainer

The 30100 mobile waste oil extractor/drainer from Alemlube is supplied standard with a height adjustable waste oil collection bowl easily positioned to accept waste oil extracted from engine crankcases, transmissions and differentials. With a holding tank capacity of 80 litres the 30100 has been designed to safely transfer and capture waste oil which can then be emptied from the machine with the aid of air pressure. The 30100 transfers waste oil at a rate of 6.5 litres per minute and the air pressure for the vacuum operates at 120psi (8.2bar) and low noise level. Inclusive of a safety valve to avoid over pressurisation, a large tray for tools, washers, filters etc., two reinforced 4" castors and two 6" reinforced reels the 30100 mobile waste oil extractor from Alemlube is covered by a two year warranty and is sure to provide years of reliable service.

PRODUCT SPECIFICATIONS, FEATURES AND BENEFITS

Extracts and captures waste oil from crankcases, transmissions and differentials

Collection bowl capacity of 20L, diameter of 420mm

Holding tank capacity of 80L

Suction speed of 6.5 L/min

Suction hose specification of 1/2" x 2000mm


Draining hose length of 1" x 2000mm

Draining pressure of 14psi (1bar)

1/4" air inlet connection

12 month warranty

Also available 30101 as above with clear inspection chamber

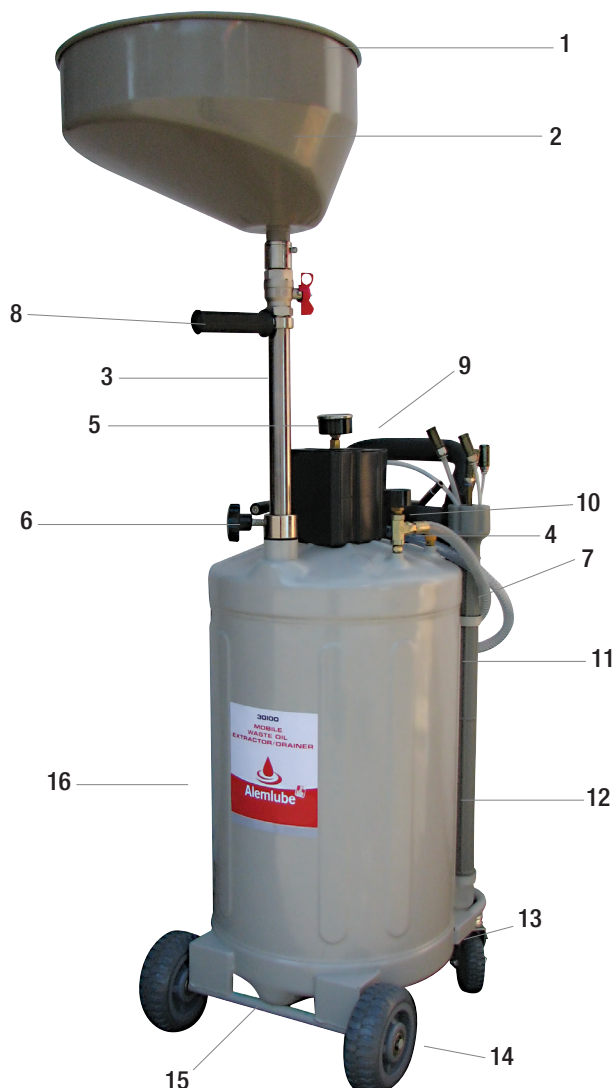

1 Metal collection bowl extension

2 20L capacity collection bowl

3 1" telescopic tube

4 Pressure safety valve

5 Pressure gauge

6 Depressurisation valve

7 1/2" suction hose 2m long

8 Lifting handle

9 Rubber covered handle

10 Parts and accessory tray

11 Audible filling level alert

12 Pneumatic flexible emptying hose 2m long

13 Poly composite wheels

14 Ball bearing wheels

15 Highly manoeuvrable

16 80L capacity holding tank

ORDERING INFORMATION

30100

Mobile Waste Oil Extractor/Drainer

