


NEW PRODUCT



INFORMATION

508810

Samoa Heavy Duty 1-1/2" Spring Rewind Hose Reel c/w 15m x 1-1/2" ID Hose

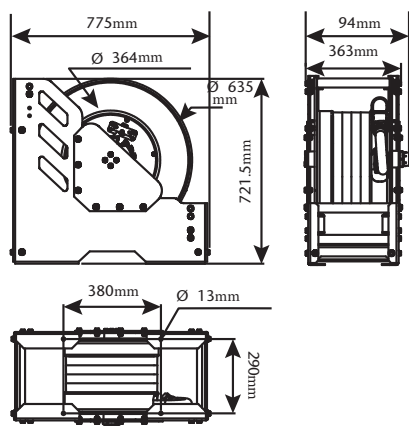

May 2019

The Samoa 508810 Heavy Duty 1-1/2" Spring Rewind Hose Reel complete with 15m x 1-1/2" ID hose has been designed, engineered & built for maximum durability when fast and efficient very high volume delivery counts.

The extremely robust all metal construction of the 508810 hose reel can be used for low pressure delivery of large volumes of water, diesel and hydraulic oils/lubricants in applications aligned with watering, diesel distribution, lube trucks, mining & construction sites, quarries, marine and aviation.

Manufactured utilising 4mm gauge steel, the wide base arms and shaft form a very rigid and stable structure and the full port, low flow restriction 1-1/2" nickel protected shaft and swivel contributes to reducing fill time and overall improved efficiency and can be mounted on the floor or on a tank.

The spool is mounted on two permanently lubricated and sealed ball bearings to effectively reduce torque load on the spring resulting in smooth retraction and a longer working life.

The 508810 hose guide arm can be placed in two different positions to accommodate any method of mounting and its narrow footprint allows more reels to be installed on the same surface.

The Samoa 508810 Heavy Duty 1-1/2" Spring Rewind Hose Reel supplied complete with 15m x 1-1/2" ID hose represents the ultimate in large scale hose reel reliability.

SPECIFICATIONS, FEATURES AND BENEFITS

- Heavy duty extremely robust all metal construction
- Working pressure of 290psi (20bar)
- Full port 1-1/2" shaft and swivel for no restrictions
- 1-1/2" goose neck hose connection
- Spool mounted on two permanently lubricated ball bearings ensures reduce torque load for smooth operation
- Dual power spring for fast and effective hose coiling
- Large effective radial latching area for ease of operation
- Zinc plated steel hose outlet rollers for maximum durability
- Powder coated for increased wear and weather resistance
- Hose guide arm can be placed in two positions
- 1-1/2" BSP (f) inlet and outlet connections
- Weight: 87kg
- Also available:

508890

Samoa Heavy Duty 1-1/2" Spring Rewind Hose Reel - bare, Rated at 1160psi (80bar)