



## PRODUCT INFORMATION


OCTOBER 2018

# SO640

## S Series Oxy Acetylene - Oxy/LPG Hose Reel

The new S Series SO640 Oxy Acetylene & Oxy/LPG hose reel from Alemlube is a genuine industrial quality welding reel ideal for all general welding applications undertaken by contractors, fabricators and people involved in the construction and industrial fields. Featuring impact resistant UV stabilised covers for maximum durability and an automatic and positive latching mechanism, the SO640 can easily be mounted on the wall or ceiling and can be carried in utes and service vehicles.

The heavy duty spring assembly retrieves the rubber hose even when fully extended and the tension adjustability function enables the spring tension to be adjusted to suit each individual application. The SO640 Oxy Acetylene hose reel from Alemlube has a maximum working pressure of 300psi (20bar), dimensions of 630 x 442 x 261mm and helps to comply with increasing OH&S requirements enabling you to provide a safer working environment while at the same time increasing efficiency and productivity.

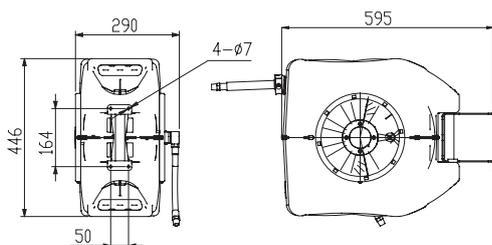

### PRODUCT SPECIFICATIONS, FEATURES AND BENEFITS

Maximum working pressure of 300psi (20bar)

Complete with 8m of 6mm ID twin rubber hoses and 0.9 lead in hose

Lead in hose : 5/8" UNF (f) fitting

-30°C - 60°C working temperature

Automatic and positive latching system

Impact resistant UV stabilised covers

Adjustable spring tension

Two piece hose stop enables quick & easy hose length adjustment

Can be mounted on the wall, ceiling, in utes and service vehicles

Suitable for use with Oxy Acetylene and Oxy/LPG

### ORDERING INFORMATION

**SO640** Oxy Acetylene - Oxy/LPG Hose Reel

